

威 佳

威佳电气,
每位工程师的专业选择!

UE-iPart

Product Introduction



使用产品前请仔细阅读本使用说明，并请妥善保管

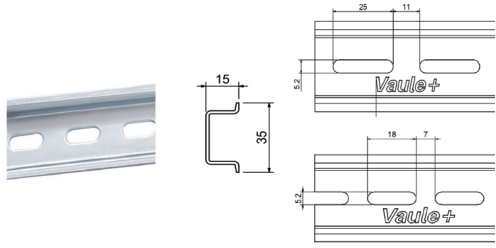
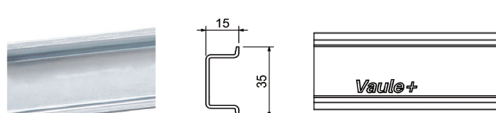
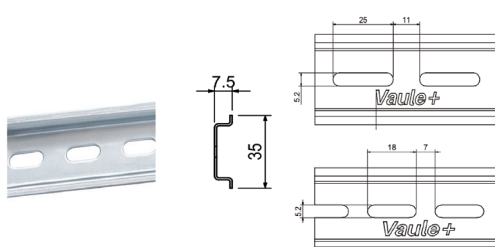
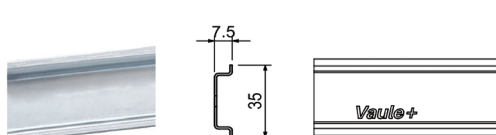
1 产品概述

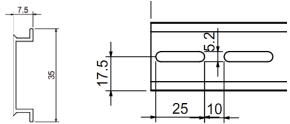
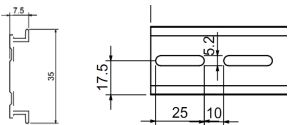
Product Description

- ▶ 优质高强度冷轧钢电镀，产品标准：GB/T 19334-2003/IEC60715；
- ▶ 电镀：蓝白锌，三价铬彩锌；
- ▶ 工作温度：-40° C 持续高温至 100° C；
- ▶ 使用方法：固定于面板后即可安装电器；
- ▶ 产品特性：美观，强度高，抗振效果佳，耐腐蚀；
- ▶ 产品功能：多单元结构连接，实现电气元件的方便快捷安装！
- ▶ High quality and high strength cold rolled steel electroplating,
product standard: GB / T 19334-2003 / iec60715;
- ▶ Electroplate: blue white zinc, trivalent chromium color zinc;
- ▶ Working temperature: - 40 ° C, continuous high temperature to 100 ° C;
- ▶ Usage: after fixed on the panel, the electrical appliance can be installed;
- ▶ Product features: beautiful, high strength, good anti vibration effect and corrosion resistance;
- ▶ Product function: multi unit structure connection, realize the convenient and quick installation of electrical components!

2 产品详情

Product Details

钢材	型号	短路电流强度	材料厚度	长度	电镀	订货号
	iS 35X15X1.5/5.2X25/ST	25mm ²	1.5mm	2m	三价铬 彩锌	2111.35151
					蓝白锌	2111.35154
	iS 35X15X1.5/5.2X18/ST	25mm ²	1.5mm	2m	三价铬 彩锌	2111.35152
					蓝白锌	2111.35155
	iS 35X15X1.5/ST	25mm ²	1.5mm	2m	三价铬 彩锌	2111.35153
					蓝白锌	2111.35156
	iS 35X7.5X1.0/5.2X25/ST	16mm ²	1mm	2m	三价铬 彩锌	2111.35751
					蓝白锌	2111.35754
	iS 35X7.5X1.0/5.2X18/ST	16mm ²	1mm	2m	三价铬 彩锌	2111.35752
					蓝白锌	2111.35755
	iS 35X7.5X1.0/ST	16mm ²	1mm	2m	三价铬 彩锌	2111.35753
					蓝白锌	2111.35756

铝	型号		材料厚度	长度	订货号
 	iS 35X7.5X1.2/5.2X25/AL/A PEN 联接方式时的额定电流 =125A		1mm	2m	2112.35751
 	iS 35X7.5X1.2/5.2X25/AL/B PEN 联接方式时的额定电流 =125A		1mm	2m	2112.35752
铜	型号	短路电流强度	材料厚度	长度	订货号
 	iS 35X15X1.5/CU PEN 联接方式时的额定电流 =309A	150mm ²	2.3mm	2m	2113.35751

UE-iPart

Product Introduction

Vaule Plus,
Professional Choice for Each Engineer!

Wuxi Vaule Plus Electric Power Technology Co.,Ltd.
South side of shuofanlihe road and west side of sun'an highway, Xinwu District, Wuxi City
Email sale@vauleplus.com

