

威 佳

威佳电气,  
每位工程师的专业选择!

# UE-iLink-FNT-5TX

Product Introduction

使用产品前请仔细阅读本使用说明，并请妥善保管

## 1 产品概述

### Product Description

该紧凑型导轨式非网管型工业以太网交换机，配置 5 个百兆电口、支持双电源输入、宽工作温度（-40 度到 75 度）、IP40 防护等级，满足工业控制现场严格的要求。

The compact guide rail type non network management Industrial Ethernet switch is equipped with five 100m electric ports, supports dual power input, wide working temperature (- 40 ° to 75 ° C) and IP40 protection grade, which meets the strict requirements of industrial control site.


#### 1.1 产品参数 Product Parameters

|                            |                                                                        |
|----------------------------|------------------------------------------------------------------------|
| 以太网范围 Ethernet Range       | IEEE 802.3<br>IEEE 802.3u<br>IEEE 802.3x                               |
| MAC 地址表 MAC Address Table  | 2K                                                                     |
| 数据包缓存 Packet Cache         | 1Mbit                                                                  |
| 处理方式 Treatment Method      | 存储转发<br>Store and Forward                                              |
| RJ45 端口数 RJ45 Port         | 5 个百兆电口<br>5 100Mbps Electric Ports                                    |
| 传输距离 Transmission Distance | 多模双纤 2km<br>Multimode Dual Fiber 2km                                   |
| LED 指示灯 LED Indicator      | 电源、电口<br>Power Supply, Electric Port                                   |
| 电源输入 Power Input           | 24V 输入：双路 12~36VDC，4 针端子<br>24V Input: Dual 12 ~ 36VDC, 4-pin Terminal |
| 电源功耗 Power Consumption     | 最大 4W Max. 4W                                                          |
| 电源保护 Power Protection      | 过载保护、反向保护<br>Overload Protection, Reverse Protection                   |

|                                           |                                                                          |
|-------------------------------------------|--------------------------------------------------------------------------|
| 工作 / 存储温度 Operating / Storage Temperature | -40~75°C / -40~85°C                                                      |
| 工作湿度 Working Humidity                     | 5%~95% 无凝露 No Condensation                                               |
| 尺寸 Size                                   | 30*125*88mm                                                              |
| 防护等级 Degree of Protection                 | IP40                                                                     |
| 安装方式 Installation Mode                    | 默认导轨安装，可选壁挂安装<br>Default guide rail installation, optional wall mounting |

## 2 结构图

### Structure Diagram

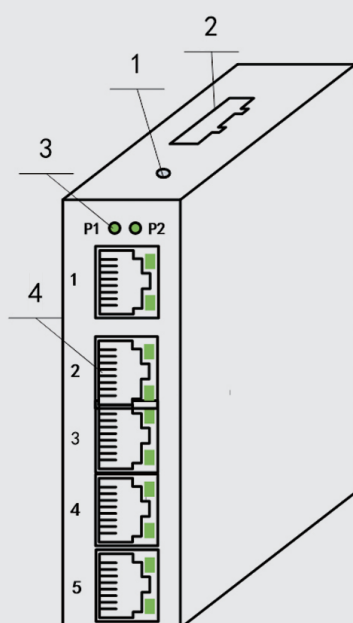

1 接地

3 电源指示灯

2 电源接口

4 百兆电口

# UE-iLink-FNT-5TX

## Product Introduction

---

Vaule Plus,  
Professional Choice for Each Engineer!

Wuxi Vaule Plus Electric Power Technology Co.,Ltd.  
South side of shuofanlihe road and west side of sun'an highway, Xinwu District, Wuxi City  
Email [sale@vauleplus.com](mailto:sale@vauleplus.com)

