


威 佳

威佳电气,  
每位工程师的专业选择!

# UE-iCooling-DP225

Product Introduction

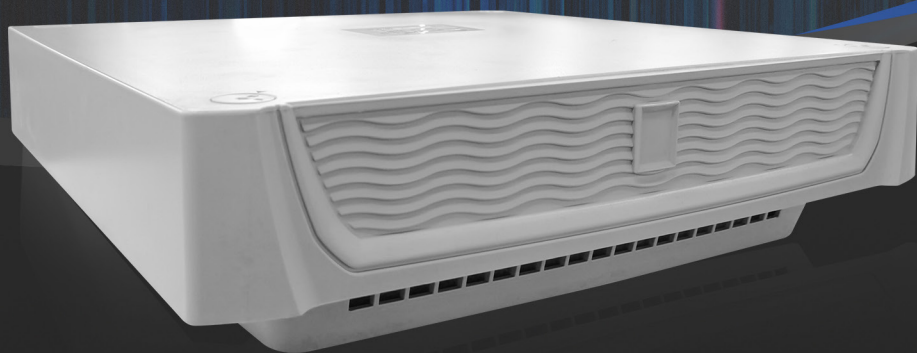

使用产品前请仔细阅读本使用说明，并请妥善保管

## 1 产品概述

### Product Description

高效排出高热负载，降低空气相互摩擦而产生的噪音。安全可靠，结构合理，不占用内部空间。


Efficiently discharge high heat load and reduce the noise caused by air friction. Safe and reliable, reasonable structure, no occupation of internal space.

#### 1.1 产品参数 Product Parameters


电压 Voltage	230/240V
频率 Frequency	50/60Hz
气流量自由送风量 Free Air Flow	1200/1340m <sup>3</sup> /h
带过滤棉风量 Air Volume With Filter Cotton	870/960m <sup>3</sup> /h
离心风机 Centrifugal Fan	电容启动 Capacitor Startup
额定电流 Rated current	0.6/0.74A
额定功率 Rated power	130/170W
长 Length	400mm
宽 Width	400mm
高 Height	135mm
噪音等级 Noise Level	74dB(A)
存储温度范围 Storage Temperature Range	-20~+55°C

## 2 结构图

### Structure Diagram

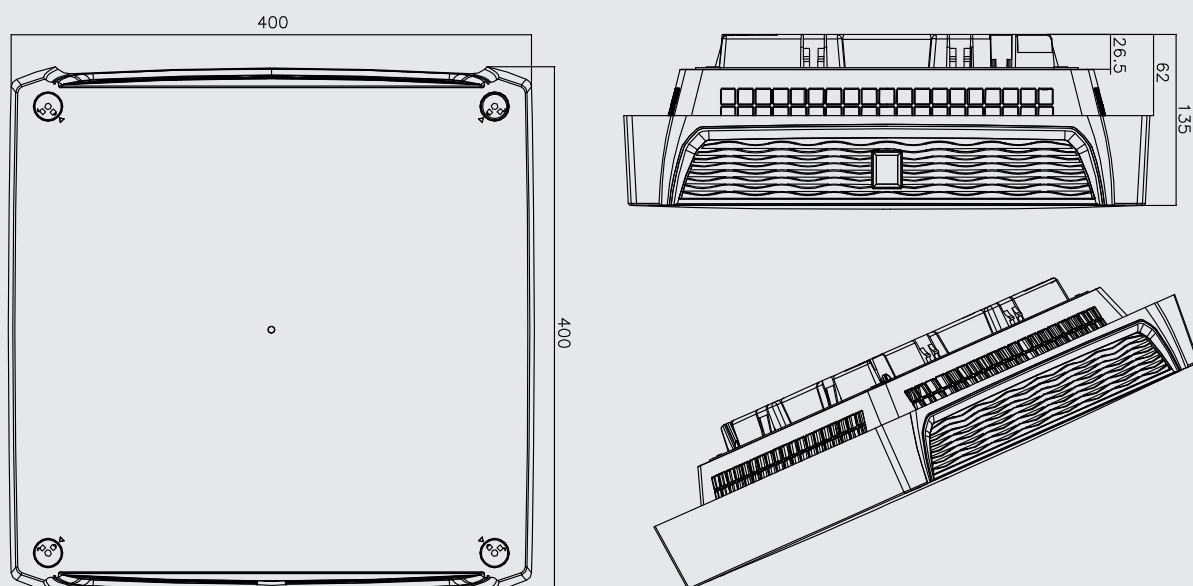

### 开孔尺寸 Cut-Out Size

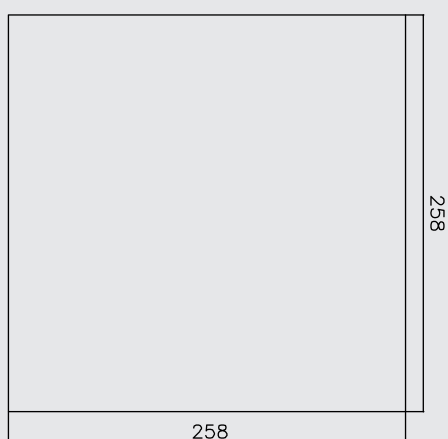



# UE-iCooling-DP225

## Product Introduction

---

Vaule Plus,  
Professional Choice for Each Engineer!

Wuxi Vaule Plus Electric Power Technology Co.,Ltd.  
South side of shuofanlihe road and west side of sun'an highway, Xinwu District, Wuxi City  
Email [sale@vauleplus.com](mailto:sale@vauleplus.com)

