

威 佳

威佳电气,
每位工程师的专业选择!

UE-iLink-VD100-160A

Product Introduction



使用产品前请仔细阅读本使用说明, 并请妥善保管

1 产品概述

Product Description

易于连接：进线与出线 (Easy connection: incoming and outgoing lines)

I=160A IEC

导轨或底板安装 (Guide rail or base plate installation)

95% 接触率 (95% contact rate)

可以目测确认连接可靠 (It can be visually confirmed that the connection is reliable)


可插接并联 (Pluggable parallel)

1.1 产品参数 Product Parameters


产品型号	VD-100-160A
最大载流 IEC	160A
级 / 相数	1
线路端 (每相连接数)	1 根导线
线路端 (最小最大导体规格)	10-70mm ²
线路端 (每相连接数)	7 根导线
线路端 (最小最大导体规格)	6-16mm ² *1, 2.5-16mm ² *6
最大工作电压 IEC	1000VAC
耐受电流	11.8kA
耐受峰值电流	30kA
材质	PC 树脂 +PA66
运行温度	-40°C ~+80°C
储存温度	-40°C ~+80°C
阻燃等级	UL94-V0
产品认证	CE 认证 (UD-160A)

2 2D 图纸

2D Drawing

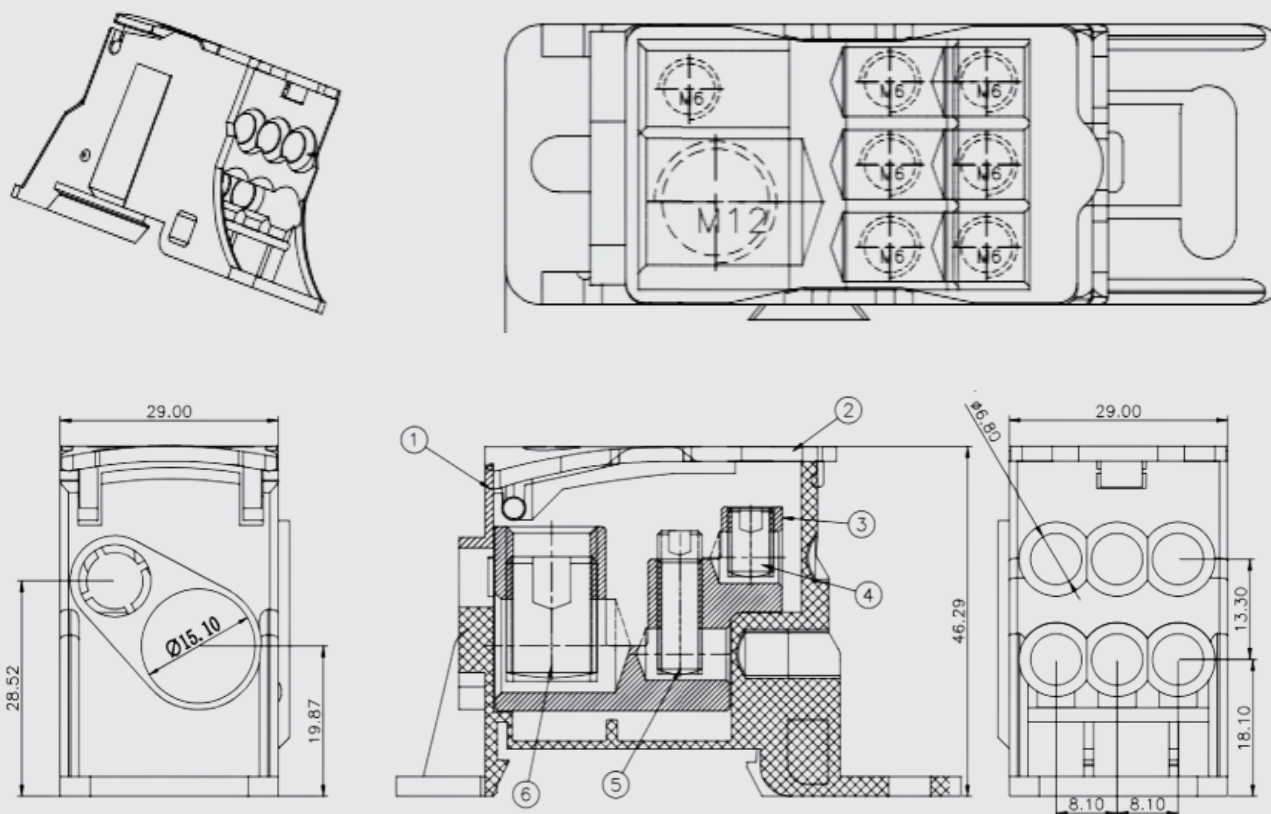

安装孔位图 Installation diagram

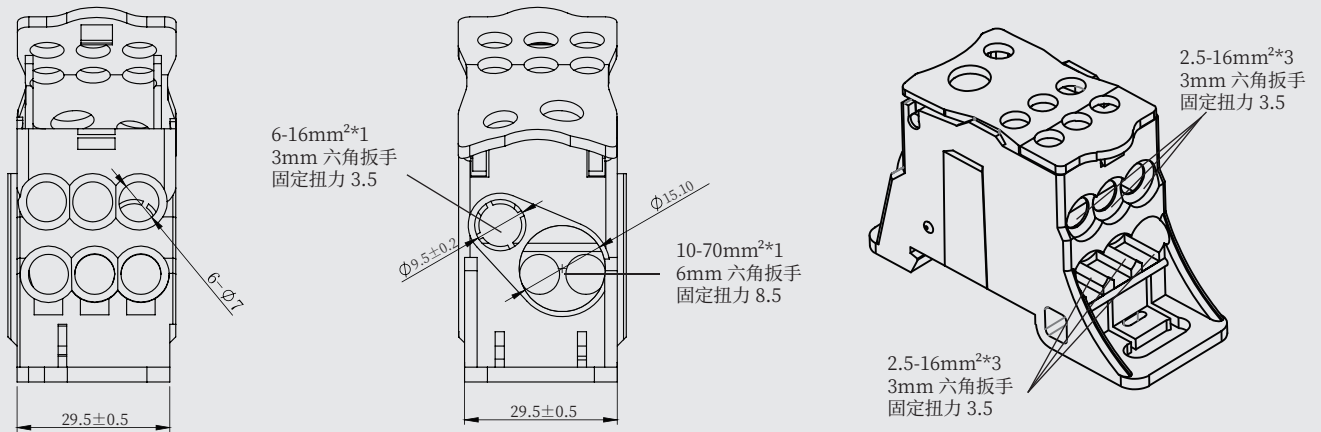

3 接线图

Wiring diagram

	mm ²		
	10...70	x1	
	6...16**	x1	
	2.5...16	x6	

** 或通用跳线

UE-iLink-VD100-160A

Product Introduction

Vaule Plus,
Professional Choice for Each Engineer!

Wuxi Vaule Plus Electric Power Technology Co.,Ltd.
South side of shuofanlihe road and west side of sun'an highway, Xinwu District, Wuxi City
Email sale@vauleplus.com

