


威 佳

威佳电气,  
每位工程师的专业选择!

# UE-iCooling-UF3326

Product Introduction

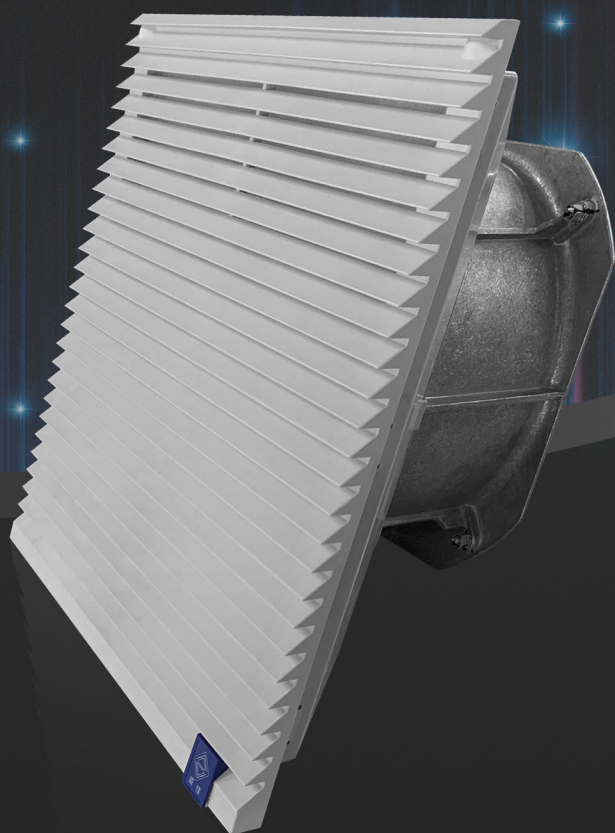

使用产品前请仔细阅读本使用说明，并请妥善保管

## 1 产品概述

### Product Description

Vaule+ 过滤器

为了通过对流进行通风,可在机柜的上面或下面部分安装一个过滤器风扇。

颜色:外壳 RAL7035 色。

供货范围:完整的安装单元,包含过滤垫、风机。

In order to ventilate by convection, a filter fan can be installed on the upper or lower part of the cabinet.

Color: Shell RAL7035.

Supply: Complete installation unit, including filter pad and fan.

#### 1.1 产品参数 Product Parameters

|                                          |                          |
|------------------------------------------|--------------------------|
| 额定工作电压 Rated Working Voltage<br>V, ~, Hz | 230, 1 ~, 50/60          |
| 气流量自由送风量 Free Air Flow                   | 680/820m <sup>3</sup> /h |
| 带过滤棉风量 Air Volume With Filter Cotton     | 520/560m <sup>3</sup> /h |
| 消耗功率 Power Consumption                   | 64/80W                   |
| 额定电流 Rated Current                       | 0.29/0.34A               |
| 阻燃等级 Flame Retardant Grade               | V0                       |
| 防护等级 Protection Level                    | IP54                     |
| 外壳材质 Shell Material                      | ASA+PC                   |
| 宽度 (B) Width                             | 323mm                    |
| 高度 (H) Height                            | 323mm                    |
| 深度 (T1) Depth                            | 12.5mm                   |



## UE-iCooling-UF3326

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| 最大安装深度 (T2) Maximum Installation Depth            | 128mm                    |
| 标准安装开口尺寸 (B*H) Standard Installation Opening Size | 292*292mm                |
| 风扇 Fan                                            | 交流轴流风机 AC Axial Flow Fan |
| 工作温度范围 Operating Temperature Range                | -30°C /+70°C             |
| 贮存温度范围 Storage Temperature Range                  | -40°C /+80°C             |
| 噪音等级 Noise Level                                  | 59 dB(A)                 |
| 滤棉材质 Filter Cotton Material                       | 聚烯烃纤维 Polyolefin Fiber   |
| 过滤等级 Filtration Grade                             | G3                       |


## 2 原理图

### Schematic Diagram

#### 2D 图纸 2D Drawing

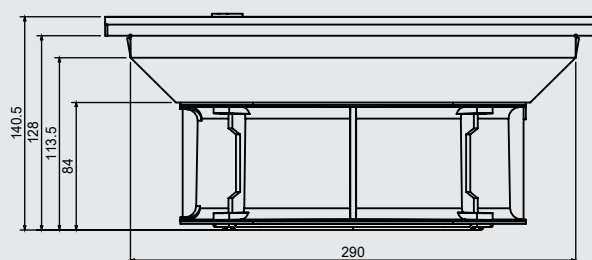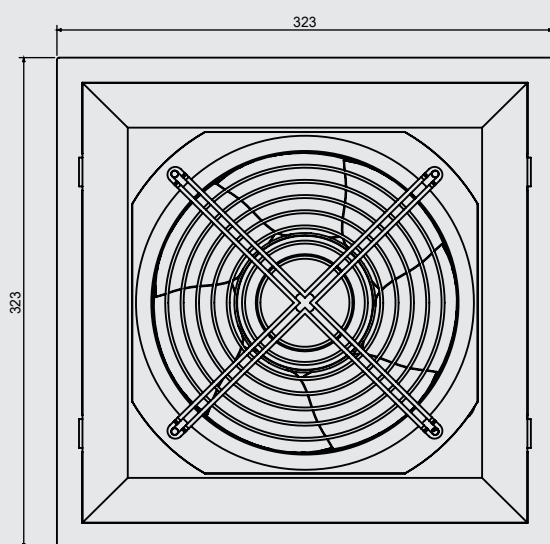

## 安装图 Installation Diagram

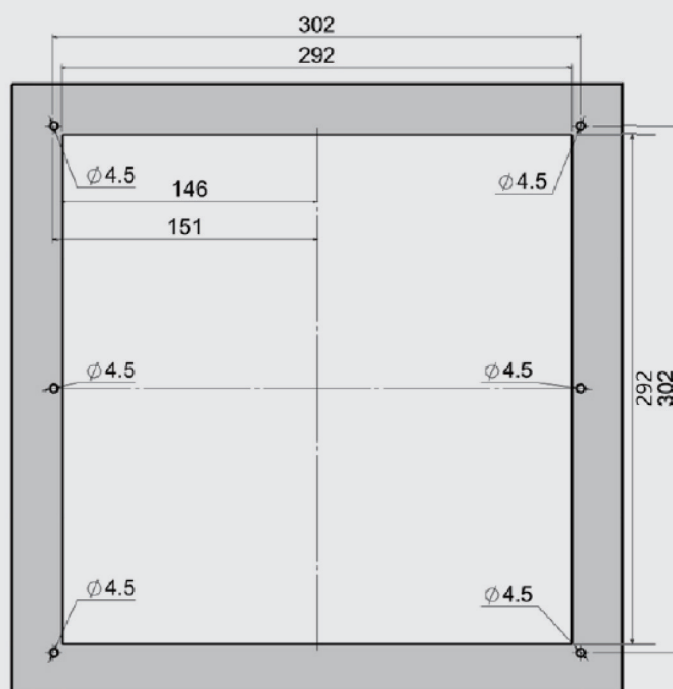



# UE-iCooling-UF3326

## Product Introduction

---

Vaule Plus,  
Professional Choice for Each Engineer!

Wuxi Vaule Plus Electric Power Technology Co.,Ltd.  
South side of shuofanlihe road and west side of sun'an highway, Xinwu District, Wuxi City  
Email [sale@vauleplus.com](mailto:sale@vauleplus.com)

